

# CDAS – Clean Dry Air System

CDAS HL 050 - CDAS HL 085



## Adsorption Dryers

Whether a compressed air user wants to control the growth of micro-organisms (essential for direct and in-direct contact applications in the food, beverage & pharmaceutical industries), ensure air used for critical applications / instrumentation is free from water contamination or has external piping where low ambient temperature can cause condensation, adsorption dryers are the go to dryer technology.

There are many different adsorption dryer technologies available and whilst they all reduce water from the compressed air in the same way, they differ in the way they regenerate the desiccant material.

## Heatless Adsorption Dryers

The simplest and most common method used to regenerate the adsorbent desiccant material is the 'heatless' method (so called as it does not use heat for desiccant regeneration).

Using a proportion of the clean, dry process air for regeneration, heatless dryers typically have the lowest capital costs of all adsorption dryer types (due to the simplicity of the heatless design).

Being very robust and having fewer components, they typically have the lowest maintenance cost of all the adsorption technologies.

Heatless dryers are available to suit all compressed air flow rates from small to large, whereas the more complicated regeneration methods are often only available for higher flow rates due to cost and complexity of the designs.



## Advantages

- Parker CDAS dryers provide a constant outlet dewpoint in accordance with ISO8573-1 classes 1, 2 or 3 for water vapour
- Parker CDAS dryers provide an outlet dewpoint which inhibits the growth of micro-organisms (allowing their efficient reduction using filtration)
- Parker CDAS dryers use clean, dry purge air for regeneration, eliminating any risk of damage to the adsorption bed or re-contamination of the downstream compressed air
- Parker CDAS dryer performance has been tested in accordance with ISO7183, the international standard for compressed air dryer testing
- The dewpoint performance of Parker CDAS dryers has been 3rd party validated by Lloyds Register to ISO8573-1 air purity classifications
- No heat is used for regeneration; therefore, no insulation is required and loss of dewpoint on column changeover due to inefficient cool down is eliminated
- Parker CDAS dryers include Parker OIL-X General Purpose & High Efficiency Coalescing pre-filtration and General Purpose Dry Particulate post filtration as standard
- Full feature electronic control with dewpoint display and Energy Saving Technology fitted as standard



Dryer Performance

| Dryer Models | Dewpoint (Standard) |     | ISO8573-1:2010 Classification (Standard) | Dewpoint (Option 1) |      | ISO8573-1:2010 Classification (Option 1) | Dewpoint (Option 2) |    | ISO8573-1:2010 Classification (Option 2) |
|--------------|---------------------|-----|------------------------------------------|---------------------|------|------------------------------------------|---------------------|----|------------------------------------------|
|              | °C                  | °F  |                                          | °C                  | °F   |                                          | °C                  | °F |                                          |
| CDAS HL      | -40                 | -40 | Class 2.2.2                              | -70                 | -100 | Class 2.1.2                              | -20                 | -4 | Class 2.3.2                              |

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

| Dryer Models      | Minimum Operating Pressure |       | Maximum Operating Pressure |       | Minimum Operating Temperature |    | Maximum Operating Temperature |     | Maximum Ambient Temperature |     | Electrical Supply (Standard)  | Electrical Supply (Optional) | Thread Type | Noise Level |
|-------------------|----------------------------|-------|----------------------------|-------|-------------------------------|----|-------------------------------|-----|-----------------------------|-----|-------------------------------|------------------------------|-------------|-------------|
|                   | bar g                      | psi g | bar g                      | psi g | °C                            | °F | °C                            | °F  | °C                          | °F  |                               |                              |             | dB(A)       |
| CDAS HL 050 - 085 | 4                          | 58    | 16                         | 232   | 5                             | 41 | 50                            | 122 | 55                          | 131 | 100-240V (+/-10%) 1ph 50/60Hz | 24V DC                       | BSPP or NPT | <75         |

Flow Rates

| Model       | Pipe Size<br>BSPP or NPT | Inlet Flow Rate |        |       |     |
|-------------|--------------------------|-----------------|--------|-------|-----|
|             |                          | L/s             | m³/min | m³/hr | cfm |
| CDAS HL 050 | ½"                       | 15              | 0.92   | 55    | 32  |
| CDAS HL 055 | ½"                       | 19              | 1.17   | 70    | 41  |
| CDAS HL 060 | ½"                       | 25              | 1.50   | 90    | 53  |
| CDAS HL 065 | ½"                       | 31              | 1.84   | 110   | 65  |
| CDAS HL 070 | ¾"                       | 42              | 2.51   | 150   | 88  |
| CDAS HL 075 | 1"                       | 51              | 3.09   | 185   | 109 |
| CDAS HL 080 | 1"                       | 61              | 3.67   | 220   | 129 |
| CDAS HL 085 | 1½"                      | 83              | 5.01   | 300   | 177 |

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

Minimum Drying Capacity = System Flow x CFIT x CFAT x CFMIP x CFOD

CFIT - Correction Factor Maximum Inlet Temperature

| Maximum Inlet Temperature | °C | 25   | 30   | 35   | 40   | 45   | 50   |
|---------------------------|----|------|------|------|------|------|------|
|                           | °F | 77   | 86   | 95   | 104  | 113  | 122  |
| Correction Factor         |    | 1.00 | 1.00 | 1.00 | 1.04 | 1.14 | 1.37 |

CFAT - Correction Factor Maximum Ambient Temperature

| Maximum Ambient Temperature | °C | 25   | 30   | 35   | 40   | 45   | 50   |
|-----------------------------|----|------|------|------|------|------|------|
|                             | °F | 77   | 86   | 95   | 104  | 113  | 122  |
| Correction Factor           |    | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

CFMIP - Correction Factor Minimum Inlet Pressure

| Minimum Inlet Pressure | bar g | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 15   | 16   |
|------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                        | psi g | 58   | 73   | 87   | 100  | 116  | 131  | 145  | 160  | 174  | 189  | 203  | 218  | 232  |
| Correction Factor      |       | 1.60 | 1.33 | 1.14 | 1.00 | 0.89 | 0.80 | 0.73 | 0.67 | 0.62 | 0.57 | 0.53 | 0.50 | 0.47 |

CFOD - Correction Factor Outlet Dewpoint

| Outlet Dewpoint   | °C | -20  | -40  | -70  |
|-------------------|----|------|------|------|
|                   | °F | -4   | -40  | -100 |
| Correction Factor |    | 0.91 | 1.00 | 2.00 |

## Controller Functions

| Dryer Models | Controller Function |                         |                  |                                |                          |                         |                                                       |                                 |
|--------------|---------------------|-------------------------|------------------|--------------------------------|--------------------------|-------------------------|-------------------------------------------------------|---------------------------------|
|              | Power On Indication | Visual Fault Indication | Dewpoint Display | EST - Energy Saving Technology | Filter Service Indicator | Dryer Service Indicator | Fault Relay: Power Loss Dewpoint Alarm Sensor Failure | 4-20mA Dewpoint Re-transmission |
| CDAS HL      | •                   | •                       | •                | •                              | •                        | •                       | •                                                     | •                               |


## Included Filtration

| Model       | Pipe Size<br>BSPP or NPT | Dryer Inlet                |                        | Dryer Outlet                |                                        |                                        |
|-------------|--------------------------|----------------------------|------------------------|-----------------------------|----------------------------------------|----------------------------------------|
|             |                          | General Purpose Pre-filter | High Efficiency Filter | Oil Vapour Reduction Filter | General Purpose Dry Particulate Filter | High Efficiency Dry Particulate Filter |
| CDAS HL 050 | ½"                       | AOPX015C                   | AAPX015C               | -                           | AOPX015C                               | -                                      |
| CDAS HL 055 | ½"                       | AOPX015C                   | AAPX015C               | -                           | AOPX015C                               | -                                      |
| CDAS HL 060 | ½"                       | AOPX020C                   | AAPX020C               | -                           | AOPX020C                               | -                                      |
| CDAS HL 065 | ½"                       | AOPX020C                   | AAPX020C               | -                           | AOPX020C                               | -                                      |
| CDAS HL 070 | ¾"                       | AOPX025D                   | AAPX025D               | -                           | AOPX025D                               | -                                      |
| CDAS HL 075 | 1"                       | AOPX025E                   | AAPX025E               | -                           | AOPX025E                               | -                                      |
| CDAS HL 080 | 1"                       | AOPX025E                   | AAPX025E               | -                           | AOPX025E                               | -                                      |
| CDAS HL 085 | 1 ½"                     | AOPX030G                   | AAPX030G               | -                           | AOPX030G                               | -                                      |

| Filtration Performance                                     | General Purpose Pre-filter | High Efficiency Filter     | Oil Vapour Reduction Filter | General Purpose Dry Particulate Filter | High Efficiency Dry Particulate Filter |
|------------------------------------------------------------|----------------------------|----------------------------|-----------------------------|----------------------------------------|----------------------------------------|
| Filtration Grade                                           | Grade AO                   | Grade AA                   | -                           | Grade AO                               | -                                      |
| Filtration Type                                            | Coalescing                 | Coalescing                 | -                           | Dry Particulate                        | -                                      |
| Particle Reduction (inc water & oil aerosols)              | Down to 1 micron           | Down to 0.01 micron        | -                           | Down to 1 micron                       | -                                      |
| Maximum Remaining Oil Aerosol Content at 21°C              | ≤0.5 mg/m³ (≤0.5 ppm(w))   | ≤0.01 mg/m³ (≤0.01 ppm(w)) | -                           | N/A                                    | -                                      |
| Maximum Remaining Oil Vapour Content at System Temperature | N/A                        | N/A                        | -                           | N/A                                    | -                                      |
| Filtration Efficiency                                      | 99.925%                    | 99.9999%                   | -                           | 99.925%                                | -                                      |

## Weights & Dimensions

| Model       | Pipe Size<br>BSPP or<br>NPT | Dimensions |     |           |     |           |     | Weight |     |
|-------------|-----------------------------|------------|-----|-----------|-----|-----------|-----|--------|-----|
|             |                             | Height (H) |     | Width (W) |     | Depth (D) |     |        |     |
|             |                             | mm         | ins | mm        | ins | mm        | ins | kg     | lbs |
| CDAS HL 050 | ½”                          | 1133       | 45  | 559       | 22  | 490       | 19  | 76     | 168 |
| CDAS HL 055 | ½”                          | 1313       | 52  | 559       | 22  | 490       | 19  | 84     | 185 |
| CDAS HL 060 | ½”                          | 1510       | 59  | 559       | 22  | 490       | 19  | 93     | 205 |
| CDAS HL 065 | ½”                          | 1660       | 65  | 559       | 22  | 490       | 19  | 100    | 220 |
| CDAS HL 070 | ¾”                          | 2020       | 80  | 559       | 22  | 490       | 19  | 120    | 265 |
| CDAS HL 075 | 1”                          | 1595       | 63  | 559       | 22  | 682       | 27  | 165    | 364 |
| CDAS HL 080 | 1”                          | 1745       | 69  | 559       | 22  | 682       | 27  | 180    | 397 |
| CDAS HL 085 | 1 ½”                        | 2105       | 83  | 559       | 22  | 682       | 27  | 210    | 463 |

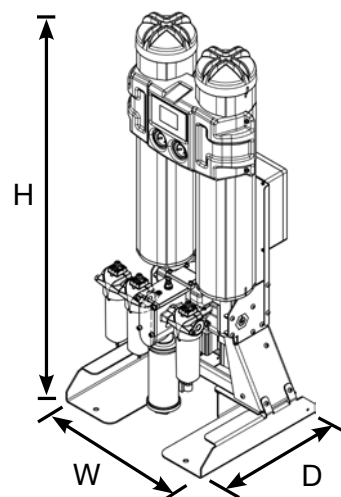

## Quality Assurance / IP Rating / Pressure Vessel Approvals

|                                  |                                                                                                           |
|----------------------------------|-----------------------------------------------------------------------------------------------------------|
| Development / Manufacture        | ISO 9001 / ISO 14001                                                                                      |
| Ingress Protection Rating        | IP55 Indoor Use Only                                                                                      |
| EU                               | Pressure vessel approved for fluid group 2 in accordance with the Pressure Equipment Directive 2014/68/EU |
| USA                              | Approval to ASME VIII Div. 1 not required                                                                 |
| AUS                              | Approval to AS1210 not required                                                                           |
| GUS                              | TR (formerly GOST-R)                                                                                      |
| For use with Compressed Air Only |                                                                                                           |

# Parker Worldwide

## Europe, Middle East, Africa

### **AE – United Arab Emirates,**

Dubai

Tel: +971 4 8127100

### **AT – Austria, St. Florian**

Tel: +43 (0)7224 66201

### **AZ – Azerbaijan, Baku**

Tel: +994 50 2233 458

### **BE/NL/LU – Benelux,**

Hendrik Ido Ambacht

Tel: +31 (0)541 585 000

### **BY – Belarus, Minsk**

Tel: +48 (0)22 573 24 00

### **CH – Switzerland, Etoy**

Tel: +41 (0)21 821 87 00

### **CZ – Czech Republic,**

Prague

Tel: +420 284 083 111

### **DE – Germany, Kaarst**

Tel: +49 (0)2131 4016 0

### **DK – Denmark, Ballerup**

Tel: +45 43 56 04 00

### **ES – Spain, Madrid**

Tel: +34 902 330 001

### **FI – Finland, Vantaa**

Tel: +358 (0)20 753 2500

### **FR – France, Contamine s/Arve**

Tel: +33 (0)4 50 25 80 25

### **GR – Greece**

Tel: +30 69 44 52 78 25

### **HU – Hungary, Budaörs**

Tel: +36 23 885 470

### **IE – Ireland, Dublin**

Tel: +353 (0)1 466 6370

### **IL – Israel**

Tel: +39 02 45 19 21

### **IT – Italy, Corsico (MI)**

Tel: +39 02 45 19 21

### **KZ – Kazakhstan, Almaty**

Tel: +7 7273 561 000

### **NO – Norway, Asker**

Tel: +47 66 75 34 00

### **PL – Poland, Warsaw**

Tel: +48 (0)22 573 24 00

### **PT – Portugal**

Tel: +351 22 999 7360

### **RO – Romania, Bucharest**

Tel: +40 21 252 1382

### **RU – Russia, Moscow**

Tel: +7 495 645-2156

### **SE – Sweden, Borås**

Tel: +46 (0)8 59 79 50 00

### **SL – Slovenia, Novo Mesto**

Tel: +386 7 337 6650

### **TR – Turkey, Istanbul**

Tel: +90 216 4997081

### **UK – United Kingdom, Warwick**

Tel: +44 (0)1926 317 878

### **ZA – South Africa, Kempton Park**

Tel: +27 (0)11 961 0700

## South America

### **AR – Argentina, Buenos Aires**

Tel: +54 3327 44 4129

### **BR – Brazil, Sao Jose dos Campos**

Tel: +55 080 0727 5374

### **CL – Chile, Santiago**

Tel: +56 22 303 9640

### **MX – Mexico, Toluca**

Tel: +52 72 2275 4200

## North America

### **CA – Canada, Milton, Ontario**

Tel: +1 905 693 3000

### **US – USA, Cleveland**

Tel: +1 216 896 3000

## Asia Pacific

### **AU – Australia, Castle Hill**

Tel: +61 (0)2-9634 7777

### **CN – China, Shanghai**

Tel: +86 21 2899 5000

### **HK – Hong Kong**

Tel: +852 2428 8008

### **IN – India, Mumbai**

Tel: +91 22 6513 7081-85

### **JP – Japan, Tokyo**

Tel: +81 (0)3 6408 3901

### **KR – South Korea, Seoul**

Tel: +82 2 559 0400

### **MY – Malaysia, Shah Alam**

Tel: +60 3 7849 0800

### **NZ – New Zealand, Mt Wellington**

Tel: +64 9 574 1744

### **SG – Singapore**

Tel: +65 6887 6300

### **TH – Thailand, Bangkok**

Tel: +662 186 7000

### **TW – Taiwan, Taipei**

Tel: +886 2 2298 8987



### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

[www.parker.com/gsf](http://www.parker.com/gsf)

